



MPO Modules and Chassis Datasheet

Products Description:

- ◆ 24 Core MPO/MTP to LC Cassette provide secure transition between MPO/MTP and LC or SC discrete connectors.
- ◆ They provide a quick, reliably high performance and efficient way to deploy up to 24 LC or 12 SC fiber ports in a single module.
- ◆ The Modules can be mounted in 1U or 4U 19' multislots chassis.
- ◆ They are available in Multi-mode and Single-mode cable.

Features:

- ◆ Available in 12/24/48 fiber versions.
- ◆ High-density and small design, Easy and fast installation
- ◆ Field connections with guaranteed quality and simplifies fiber routing.
- ◆ Modular system management, easy reconfiguration for moves, adds and changes.
- ◆ Customized fiber polarity in the module.



SHENZHEN FASTLINK COMMUNICATION GROUP CO., LTD

Technique Parameters:

Element	Characteristic
Fibre	OS1/OS2, OM1, OM2, OM3,OM4
Adaptors	MTP/MPO; -LC Duplex; LC Quadruple; SC Duplex
Connectors	MTP/MPO connector; - LC connector; SC connector
Cassette Material	Colled rolled steel
Operating Temperature	-20~+60 °C
Storage Temperature	-40~+70 °C
Dimensions	129*128*34cm

Compatibility:

Widely compatible with Huawei,ZTE,H3C,Cisco,Ruijie,HP and other switches,routers,firewalls,network cards and other equipment.



Sever



Cloud storage



Switch



Communications
room



Optical fiber
transceiver








Router



SHENZHEN FASTLINK COMMUNICATION GROUP CO., LTD

Drawing for the Cassette:

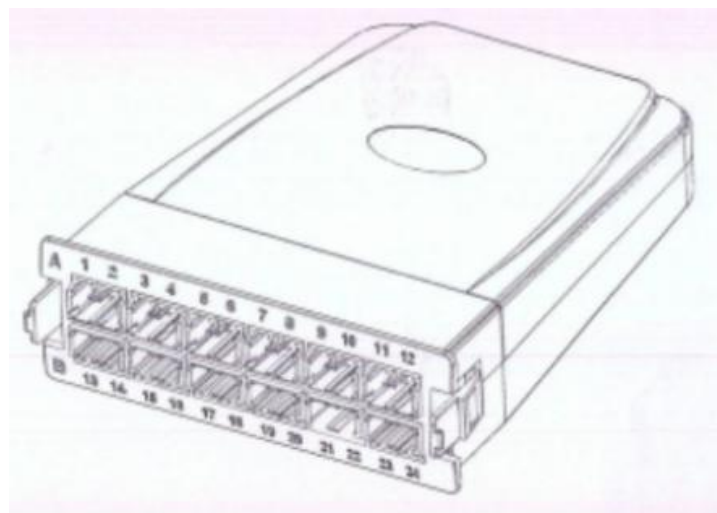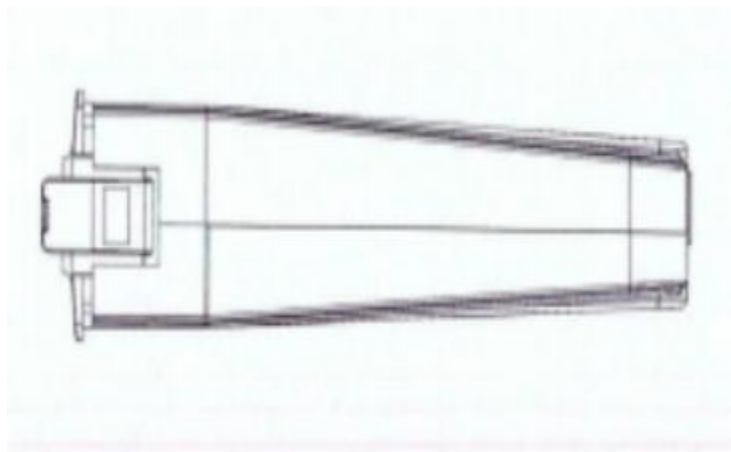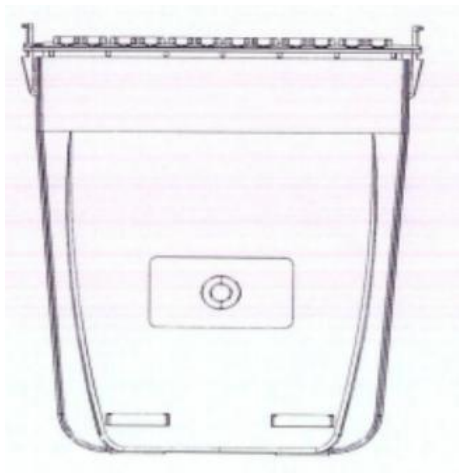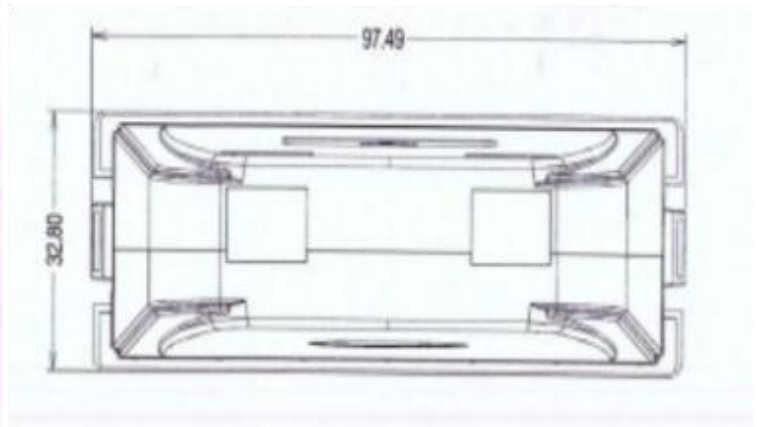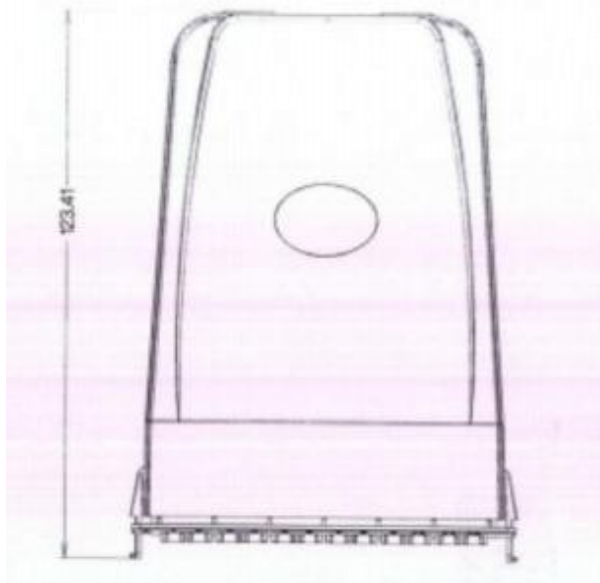



SHENZHEN FASTLINK COMMUNICATION GROUP CO., LTD

Drawing for the Chassis:

